

TEM / 3

Magnetic Antenna



DESCRIPTION


The TEM/3 antenna is a single channel magnetic field antenna useful for transient electromagnetic (TEM), controlled source audio-frequency magnetotelluric (CSAMT), and other types of EM geophysical surveys measuring vertical or horizontal fields. Multiple units may be used simultaneously to measure multiple axes.

FEATURES

- The TEM/3 can be used inside or outside the transmitting loop for transient measurements.
- Frequency calibrations are provided for both harmonic and single frequency applications.

OPTIONAL EQUIPMENT

- Antenna STAND/Z for vertical measurements.
- Antenna STAND/XZ for a combination of vertical and horizontal measurements.



Zonge Engineering and Research Organization, Inc.

Specialists in Electrical Geophysics

• Field Surveys • Geophysical Consulting • Instrumentation Sales and Lease •

SPECIFICATIONS FOR THE TEM/3 MAGNETIC ANTENNA


General

Power: two 9V batteries
Alkaline: 7 days at 12 hours per day
Lithium: >14 days at 12 hours per day
Amplifier gain: 33
Number of turns: 4000
Effective Area: 10,000 m²
Minimum Detectable Signal: 0.007 gamma•Hz
Maximum signal without saturation:
68,000 gamma•Hz
Delay constant: 15 microseconds
Multiple unit crosstalk: > 60db isolation
Electrical response: dB/dt to above 8 KHz

Physical

Length: 61cm
Diameter: 11cm
Weight: 4.5 kg
Core: ceramic ferrite, 2.54 x 45.7 cm

*Specifications subject to change without notice
© Copyright 1998, Zonge Engineering & Research Organization, Inc.*

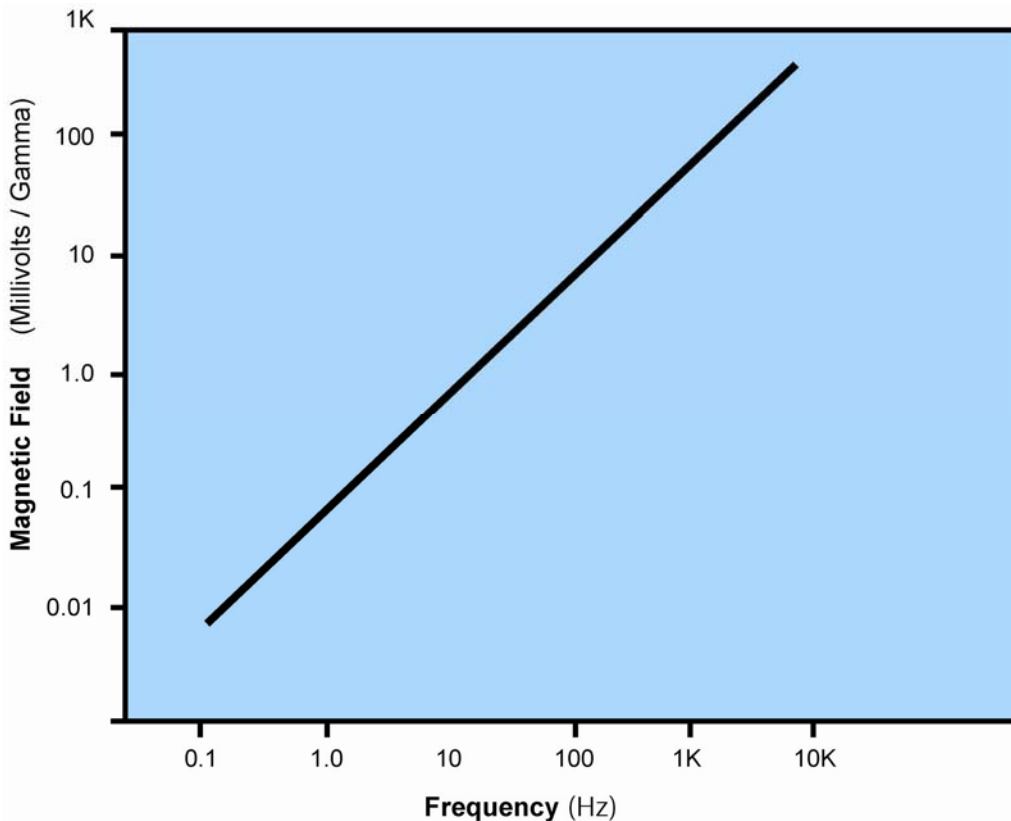

Zonge Engineering and Research Organization, Inc.

Offices:

Arizona, Alaska, Nevada, Colorado and Minnesota

Headquarters:

3322 E. Ft. Lowell Road, Tucson, AZ 85716, USA (800) 523-9913

Tel: (520) 327-5501 Email: zonge@zonge.com

Fax: (520) 325-1588 Web: <http://www.zonge.com>